


Mini™ Tankless Technical Data

Model		Mini™ 3	Mini™ 4		Mini™ 6	
Phase		1	1	1	1	1
Voltage	V	110 - 120	208	220 - 240	208	220 - 240
Wattage	kW	3.0	2.6	3.5	4.3	5.7
Amperage	A	25	12.6	15.2	20	24.7
Min. required circuit breaker size	A	30	20	20	30	30
Recommended wire size	AWG copper	10	12	12	10	10
Min. water flow to activate unit	GPM/Lmin	0.50 / 2.0	0.50 / 2.0		0.85 / 3.2	
Degree of protection according to IEC 529		IP 24				
Min. water resistivity		2795 ohm x in / 1100 ohm x cm				
Weight	lbs / KG	3.44 / 1.56				
Dimensions (Height/Width/Depth)	in / (cm)	6.5 (16.5) / 3.25 (8.2) / 7.5 (19.0)				
Working pressure	Psi / bar	150 / 10				
Tested to pressure	Psi / bar	300 / 20				
Volume of water in unit	Gal / L	0.026 / 0.1				
Water connections		for 3/8" O.D. flex connector				

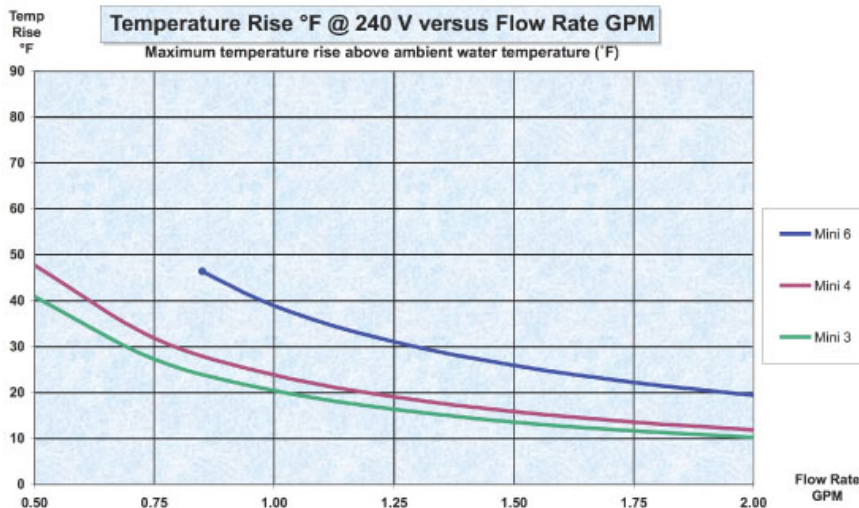

Three year limited warranty.

ISO 9001
CERTIFIED



©2010 Stiebel Eltron, Inc. All rights reserved.

[< Back to Mini™ main page](#)